

IDO Annual Update 2023

June 17th, 2024 O-24-17




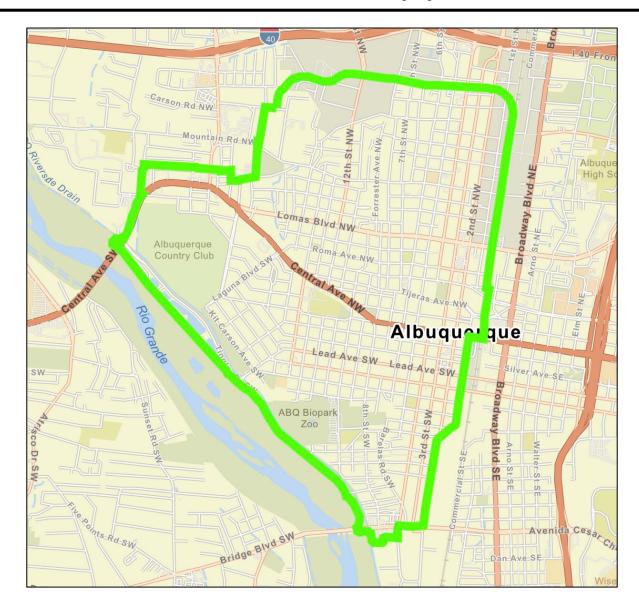

5-2(L)	RAIL TRAIL ³	99		
	5-2(L)(1)	Applicability This Subsection adjacent to the	on 14-16-5-2(A) applies to development or redevelopment on lots	
	5-2(L)(2)	Access and Connectivity On-site pedestrian walkways shall connect to the Rail Trail, as long as such access is coordinated with and approved by the Parks and Recreation Department. Edge Buffer Landscaping		
	5-2(L)(3)			
		5-2(L)(3)(a)	All new multi-family, mixed-use, or non-residential development other than industrial development shall provide a landscaped edge buffer area at least 5 feet wide and plant at least 1 tree and 3 shrubs every 25 feet along the property line abutting the Rail Trail.	
		5-2(L)(3)(b)	All new industrial development shall provide a landscaped edge buffer at least 15 feet wide along the property line abutting the Rail Trail, as specified in Subsection 14-16-5-6(E)(4)(b).	

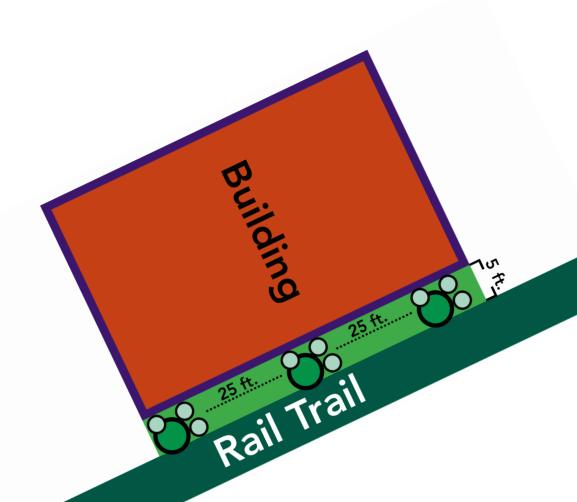


5-2(L)(4)	Wall and Fences		
	5-2(L)(4)(a)	For multi-family residential development, mixed-use development, and non-residential development other than industrial development, walls in any side or rear yard abutting the Rail Trail shall meet the requirements of Subsection 14-16-5-7(D)(3)(d).	
	5-2(L)(4)(b)	slats) shall not be allowed on any portion of a site visible from the Rail Trail. Chain link fencing is allowed as temporary security fencing during active construction.	
5-2(L)(5)	Building Height Stepdown		
	5-2(L)(5)(a)	Except within the Downtown Center (DT), a Main Street (MS) corridor, or a Premium Transit (PT) area, any portion of a primary or accessory building within 20 feet in any direction of the Rail Trail shall step down to a maximum height of 48 feet.	
	5-2(L)(5)(b)	Notwithstanding subsection (a) above, a building height stepdown is not required on properties where 100 percent of the outdoor seating and gathering areas required by Subsection 14-16-5-11(E)(3) are located abutting the Rail Trail.	

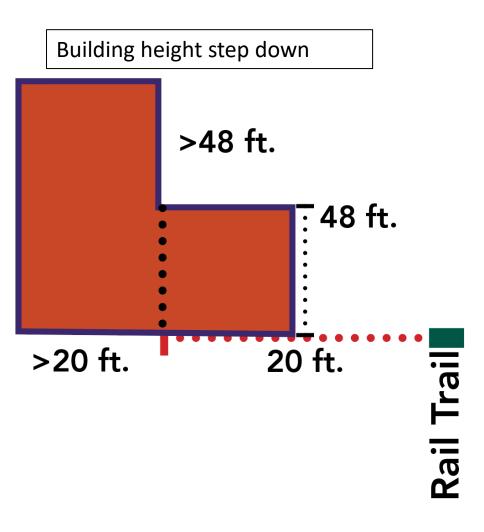

5-2(L)(5)	Building Hei	Building Height Stepdown		
	5-2(L)(5)(a)	Except within the Downtown Center (DT), a Main Street (MS) corridor, or a Premium Transit (PT) area, any portion of a primary		
		or accessory building within 20 feet in any direction of the Rail Trail shall step down to a maximum height of 48 feet.		
	5-2(L)(5)(b)	Notwithstanding subsection (a) above, a building height stepdown is not required on properties where 100 percent of the outdoor seating and gathering areas required by Subsection 14-16-5-11(E)(3) are located abutting the Rail Trail.		

Proposed Amendment:

On page 2, Section 5-2(L)(5), add a new section (c) as follows:
 [(c) Notwithstanding subsection (a) above, a building height stepdown is not required on properties where there are two or more street frontages, not including the Rail Trail.]

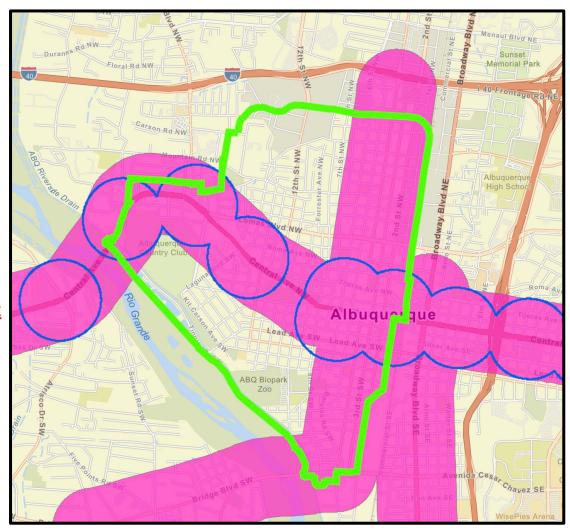

Existing EPC Red-Lined Language

5-2(L)(6) **Building Design**

5-2(L)(6)(a) In the NR-LM or NR-GM zone districts, any façade facing the Rail

<u>Trail shall meet the requirements in Subsection 14-16-5-</u>

11(E)(2)(a)3.

5-2(L)(6)(b) At least 50 percent of the Outdoor seating and gathering areas

required by Subsection 14-16-5-11(E)(3) shall be located adjacent

to the Rail Trail.

5-5(C)(5)(c) Reduction for Proximity to a City Park or Trail41

The minimum number of off-street parking spaces required may be reduced by 10 percent if the proposed development is located within 330 feet in any direction of any City park or trail.

Rail Trail¹⁴⁸

The right-of-way and/or easements designated as the Albuquerque Rail Trail by the Rank 3 Albuquerque Rail Trail Master Plan and mapped by AGIS. For the purposes of this IDO, the Rail Trail corridor is considered both a City trail and a street.

QUESTIONS?